
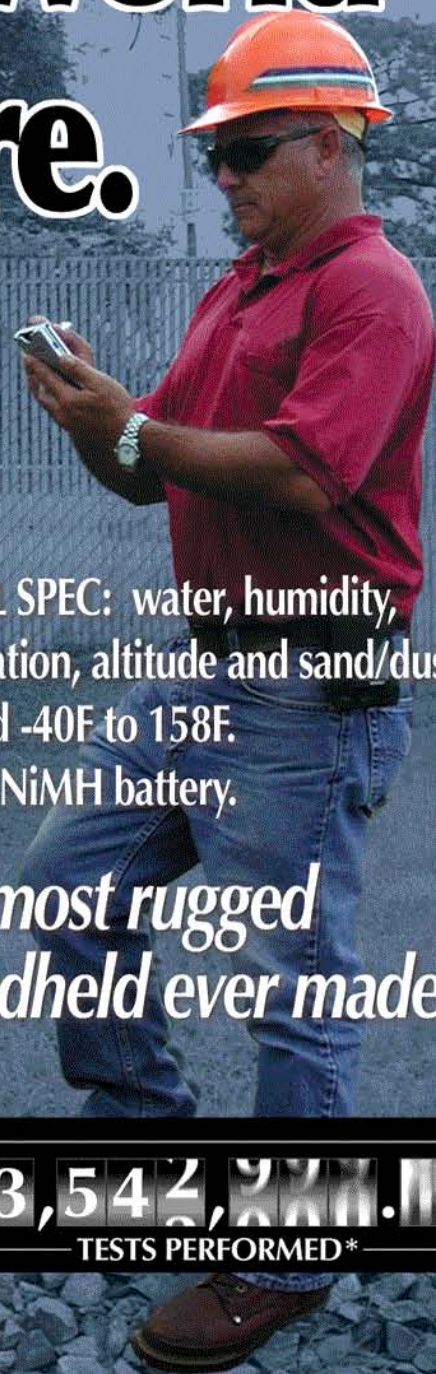


It's a Tough World Out There.

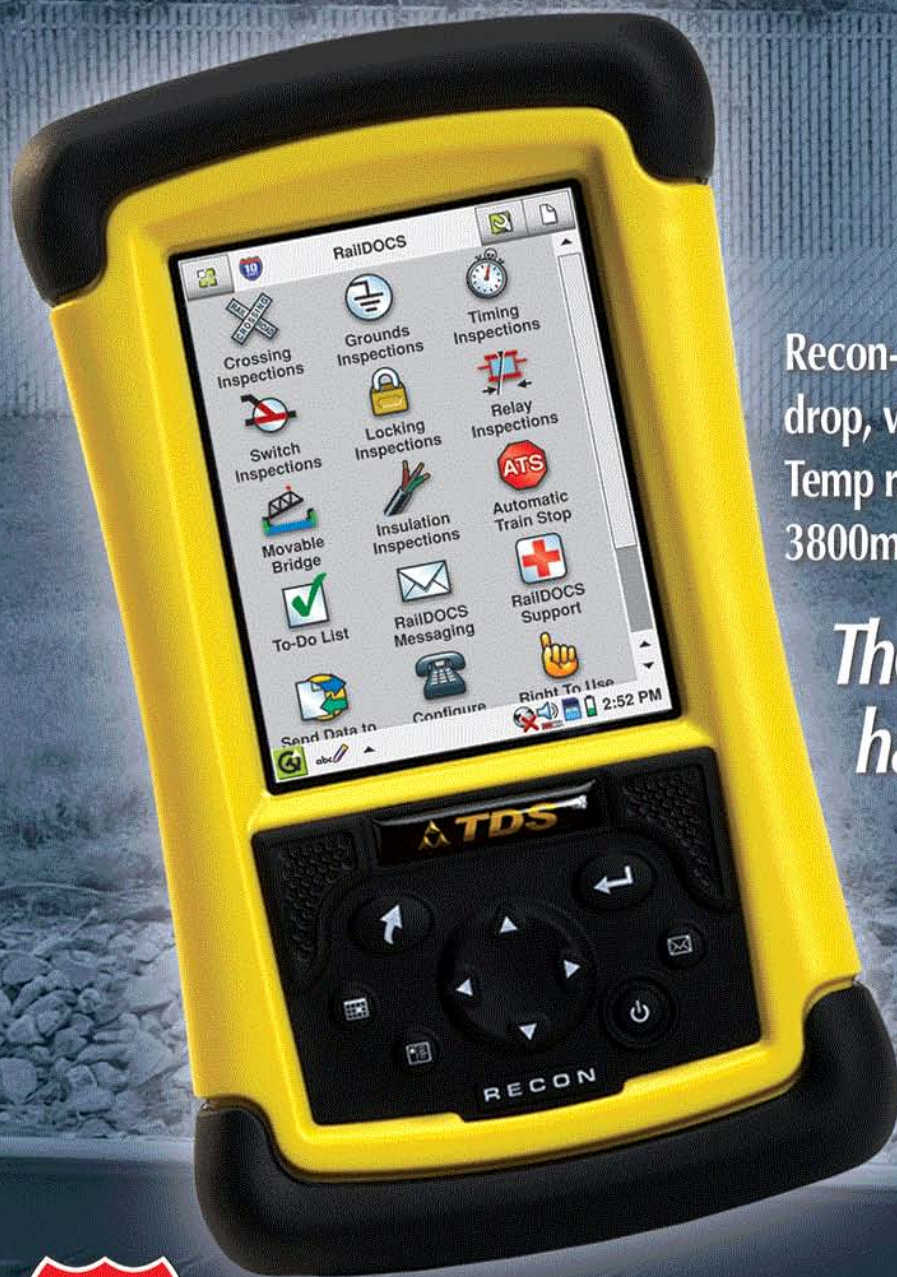

Recon-MIL SPEC: water, humidity,
drop, vibration, altitude and sand/dust.
Temp rated -40F to 158F.
3800mAh NiMH battery.

*The most rugged
handheld ever made!*

3,542,977.11
TESTS PERFORMED*



End-to-End Mobile Solutions



1387 Cassat Avenue • Jacksonville, FL 32205 • Phone 904.220.3627 • www.10east.com

*Over 3.5 million FRA/Company tests performed to date.

Specifications

STANDARD FEATURES

- Linux 2.6.12 (**Familiar/handhelds.org**)
- Commercial **Qtopia** ver. 2.1.2
- 400 MHz Intel PXA255 **XScale** processor
- 64 MB high-speed SDRAM
- 128 MB nonvolatile (NAND) storage
- Sunlight-readable color TFT display
- Rugged waterproof design
- 15 hours of continuous room-temperature operation with default settings

STANDARD SOFTWARE

- POP3, SMTP, IMAP4 - file attachment capability
- Calendar
- Address book
- To-Do
- Text editor
- Calculator
- Supports MPEG-1, MP3
- Microsoft Pictures

STANDARD ACCESSORIES

- Rechargeable PowerBoot Module
- Standard CF-Cap
- AC charger
- User's guide
- CD-ROM
- Hand strap
- Two stylus pens
- Package of 10 screen protectors

PHYSICAL

- Size
6.5" (16.5 cm) x 3.75" (9.5cm) x 1.75" (4.5cm)
- Weight
17 ounces (490 g) including rechargeable PowerBoot Module

ENVIRONMENT

- Operating temperature
-22 to 140°F (-30 to 60°C)
- Humidity
MIL-STD-810F, Method 507.4
- Water
IP67, sealed against accidental immersion
(1m for 30 min.)
MIL-STD-810, Method 512.4, Procedure I
- Drop
MIL-STD-810F, Method 516.5, Procedure IV
26 drops from 4 ft (1.22 m) onto plywood over concrete
6 additional drops at -4°F (-20°C)
6 additional drops at 140°F (60°C)
- Sand and dust
IP67, MIL-STD-810F, Method 510.4, Procedures I & II
- Vibration
MIL-STD-810F, Method 514.5, Procedure I, Fig 17 & 18
- Altitude
MIL-STD-810F, Method 500.4, Procedures I, II & III
15,000 ft at 73°F (23°C)

Specifications

ELECTRICAL

- Processor
Intel PXA255 XScale CPU
400 MHz
- Memory
64 MB high-speed SDRAM
~6 MB reserve
- Storage
Onboard nonvolatile NAND Flash
128 MB
~16 MB reserved
- Expansion
1x Type I and 1x Type II CompactFlash slots
- Display
240x320 pixel (1/4 VGA) color TFT with LED front light
- Batteries
3800 mAh NiMH rechargeable pack

I/O

- Standard 9-pin (male) D-shell RS-232 serial and USB ports

EXTENDED WARRANTY OPTION

- Key Features
 1. Covers functionality failures for additional year(s).
 2. Provides TDS factory service.
 3. Can be purchased any time during the current warranty period for a maximum of two additional years.
- Limitations
 1. TDS has the option, depending on hardware failure, to supply customer-replaceable parts, provide send-in factory repair service or provide carry-in repair service to a TDS Authorized Service Provider, or provide replacement of the product.
 2. Warranty does not cover accessories or components such as cables, user-replaceable CompactFlash cards or batteries.
 3. Excludes damage caused by misuse, accident, fire, or theft.
 4. Excludes cosmetic damage that does not affect product function.
 5. Can only be purchased while the product is under regular or extended warranty. Extended warranty is available for a maximum of two years.
 6. Available in the U.S., Canada and Puerto Rico only.